

UCM-2468



DISPLAY MODULE

Features:


- 6.8" 1280x480 TFT Display
- ARM Cortex-A7 Quad-Core CPU
- Glove Safe Capacitive Touchscreen Control Interface
- Flush Mountable
- Operating Temperature: 0-75°C (32-176°F)

Benefits:

- Durable and reliable
- Fast, convenient user-interface
- Fully-encapsulated for maximum protection in harsh environments
- Low power consumption

Wide Range of Applications:

Ideal for commercial foodservice equipment such as ovens, refrigeration equipment, fryers, dishwashers, griddles, holding equipment, industrial machines, and more.

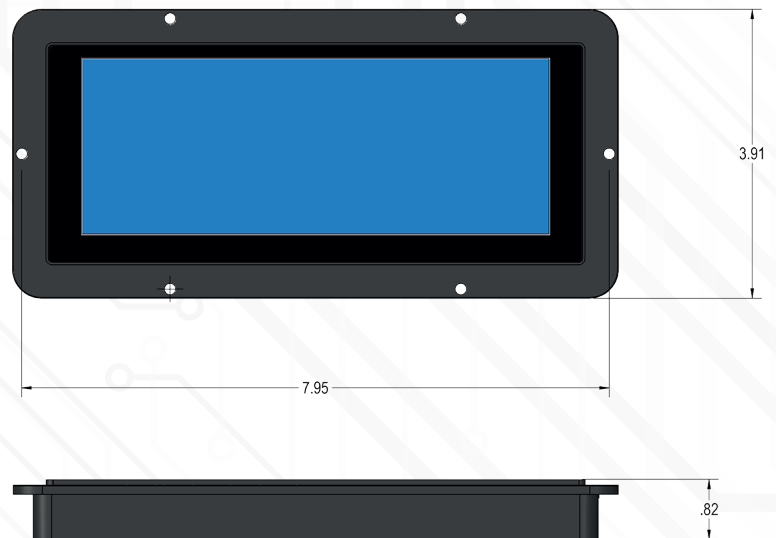

Dimensions:

- 7.98"W x 3.91"H x 0.82"D

Warranty:

- Every Renau product is thoroughly tested at numerous stages of production and comes with an extended three (3) year warranty.



We do more than design. We invent.



9309 Deering Ave. Chatsworth, CA 91311 USA

Tel: 818.341.1994 ext. 349
Fax: (818) 341-8063
info@renau.com
www.renau.com

Specifications are subject to change without notice. The products manufactured by RENA U are protected under one or more of the following U.S. Patents: 6,850,850 6,816,670 6,636,772 6,546,944 6,214,239 5,835,993 4,943,706 4,849,098 and other patents pending.
Designed and manufactured in the U.S.A.