

UCM-2424/ UCM-2224



DISPLAY MODULE

Features:

- 480x272 IPS Optically Bonded 2.4" TFT Display
- 16 GB SD Card
- 5VDC Input Voltage
- Operating Temperature: 0-75°C (32-176°F)

Benefits:

- Durable and Compact
- Fast, convenient user-interface
- Low Power Consumption
- Easily Scalable and Upgradeable
- Wide Range of Applications
- Ensures Safety and Quality


Wide Range of Applications:

Ideal for commercial foodservice equipment such as griddles, food warming/holding cabinets, refrigeration, and more.

Warranty:

- Every Renau product is thoroughly tested at numerous stages of production and comes with an extended three (3) year warranty.


UCM-2424

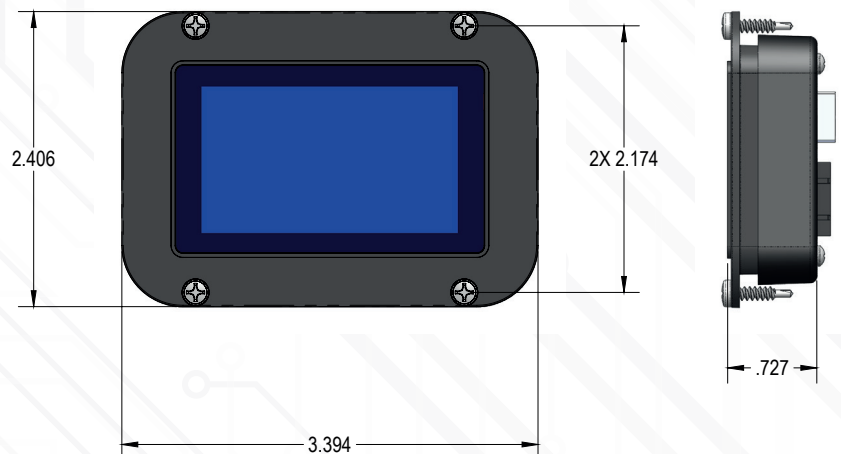

Dimensions:

- 3.39"W x 2.41"H x 0.72"D

UCM-2224

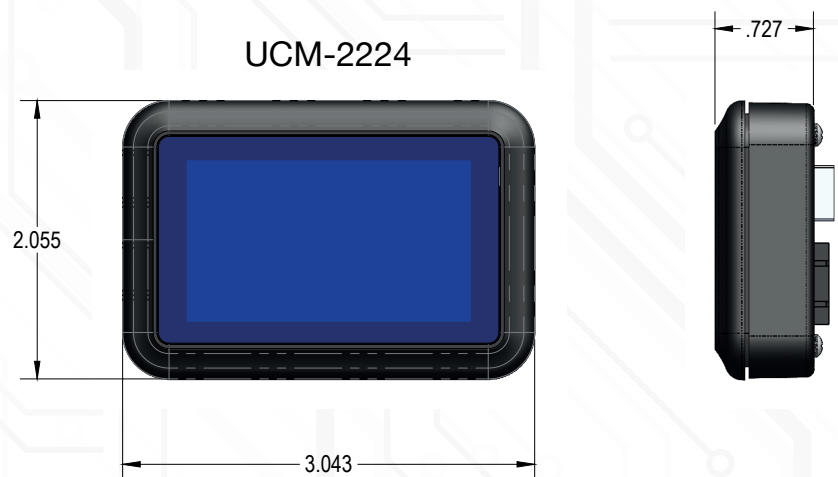

Dimensions:

- 3.04"W x 2.05"H x 0.72"D



We do more than design. We invent.

RENAU

9309 Deering Ave. Chatsworth, CA 91311 USA

Tel: 818.341.1994 ext. 349
Fax: (818) 341-8063
info@renau.com
www.renau.com

Specifications are subject to change without notice. The products manufactured by RENAU are protected under one or more of the following U.S. Patents: 6,850,850 6,816,670 6,636,772 6,546,944 6,214,239 5,835,993 4,943,706 4,849,098 and other patents pending. Designed and manufactured in the U.S.A.