

SRLM-02



TEMPERATURE MODULE

Features:



- 2 x RTD inputs
- 1 level sensor input
- 1 chassis ground input
- 1 DC output (optional)
- Wire Range: 20-6 AWG
- Operating Temperature: 0-85°C (32-185°F)

Benefits:

- Durable and reliable
- Simple, inexpensive installation
- Small footprint requires minimal space
- Fully-encapsulated for maximum environmental protection
- Low power consumption
- Easily upgradeable and scalable to meet specific needs

Wide Range of Applications:

- Ideal for commercial foodservice equipment such as ovens, food warming/ holding cabinets, fryers, refrigeration equipment, steamers, industrial machines, and more.

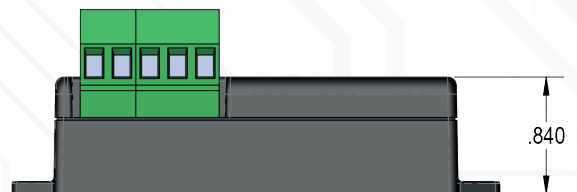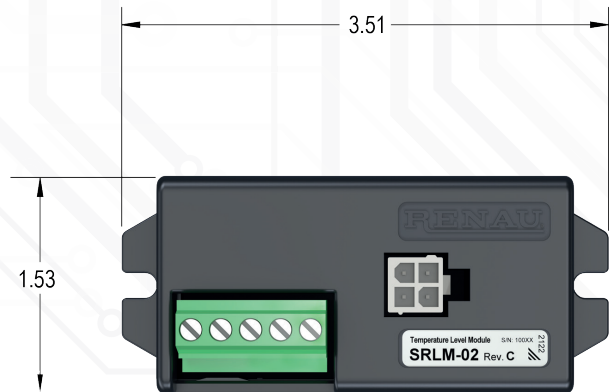

Dimensions:

- 3.51" W x 1.53" H x 0.84" D

Warranty:

- Every Renau product is thoroughly tested at numerous stages of production and comes with an extended three (3) year warranty.



We do more than design. We invent.

RENAU

9309 Deering Ave. Chatsworth, CA 91311 USA

Tel: 818.341.1994 ext. 349
Fax: (818) 341-8063
info@renau.com
www.renau.com

Specifications are subject to change without notice. The products manufactured by RENAУ are protected under one or more of the following U.S. Patents: 6,850,850 6,816,670 6,636,772 6,546,944 6,214,239 5,835,993 4,943,706 4,849,098 and other patents pending.
Designed and manufactured in the U.S.A.